




Kilovac EV250-2A & 2B - 400 Amps ("Czonka II EVX")

Make & Break Load Switching

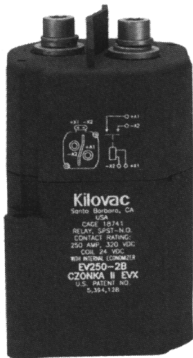


Features:

- Hydrogen dielectric for power switching high current loads
- 400 A carry, 2,500 A interrupt @ 320 Vdc
- Ideal for circuit protection, control, battery switching, and main power safety disconnect
- Versatile power, voltage, and current operating range: 28-1800Vdc tested
- Internal coil economizer provides:
 - 4W typical hold power independent of temperature & voltage range
 - EMI spectrum tested and approved
 - Built-in coil suppression
- Patented "hammer effect" mechanism breaks light contact welds
- Patented hermetically "Super-sealed" environment chamber uniquely protects ALL moving parts
- Can operate in harsh environments
- Moving contact rotates to provide fresh contact surface for low contact resistance and low power consumption
- Sealed control connector. Mating connector with flying leads P/N 2005 available, see page 59
- Special versions available:
 - Economical (-8A/B) for light duty power switching (without arc blowout magnets)
 - 10 inch flying leads model (-7A)

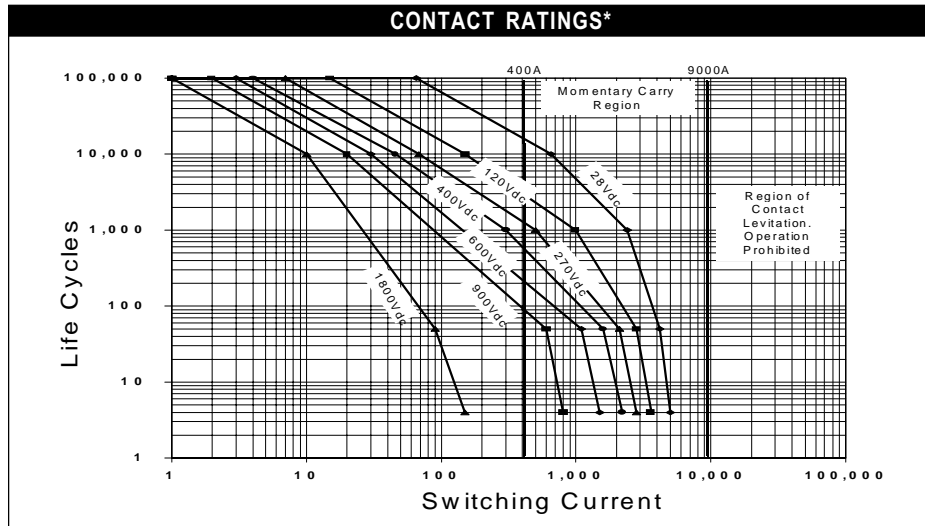

* For circuit conditions and actual data refer to the EV250 hot switch study. Since each application is unique, user is encouraged to verify rating in actual application.



PRODUCT SPECIFICATIONS

Part Number	UNIT	EV250-2A	EV250-2B
Contact Arrangement		SPST-NO	SPST-NO
Contact Form		X	X
Continuous Current Carry, Max.	A	400	400
6.5 Minutes	A	500	500
Break Current @ 320 Vdc	A	2,500	2,500
Contact Resistance, Max.	ohms	0.0003	0.0003
Contact Resistance, Typ.	ohms	0.0001 - 0.0002	0.0001 - 0.0002
Dielectric at Sea Level (leakage < 1mA)	Vrms	2,200	2,200
Shock, 11 ms 1/2 Sine (peak), operating	G's peak	30	30
Vibration, Sinusoidal (80-2000 Hz, peak)	G's	20	20
Operating Ambient Temperature Range	°C	-40 to +85	-40 to +85
Load Life, @ 320 Vdc. 95% Weibull*	cycles	See Page 19	See Page 19
Operate Time, 25° C			
Close (includes bounce) Typ.	ms	18	18
Bounce (after close only), Max.	ms	5	5
Release Time (includes arcing), Max. @ 2500A	ms	15	15
Insulation Resistance @ 500 Vdc, Min.	Mohm	100	100
Weight, Nominal	pound (kg)	1.76 (0.8)	1.76 (0.8)

* Refer to sales drawing, qualification test plan for actual mix of precharge and break currents used on each cycle.

COIL DATA**

Parameter	EV250-2A	EV250-2B	Units
Voltage* (nominal)	12	24	Vdc
Pickup (close), max.	9	18	
Hold, Min.	7	14	
Dropout (open), min.	5	10	
Current (@VsNom/ 25°C)			A
Inrush	2.8	1.8	
Holding, standby,	0.34	0.11	A
Inrush Time, max.	200	200	ms

* Other special coil voltages available upon request.
** Do not use a free wheeling diode or capacitor across the coil. Built in suppression limits back EMF to zero volts


PART NUMBER SELECTION

Sample Part No. **EV250-2** **A**
 Model _____
 2 = with blowout magnets
 8 = without blowout magnets
 7 = 10" flying leads
 (12 V, with magnets only)
 Coil Voltage _____
 A = 12 Vdc, Nominal
 B = 24 Vdc, Nominal

For detailed specifications and recommendations, refer to the EV250-2A & B or 7A sales drawings.

CURRENT vs TIME

CONTACTS CLOSED INTO 70% AND 90% CAPACITOR PRE CHARGE

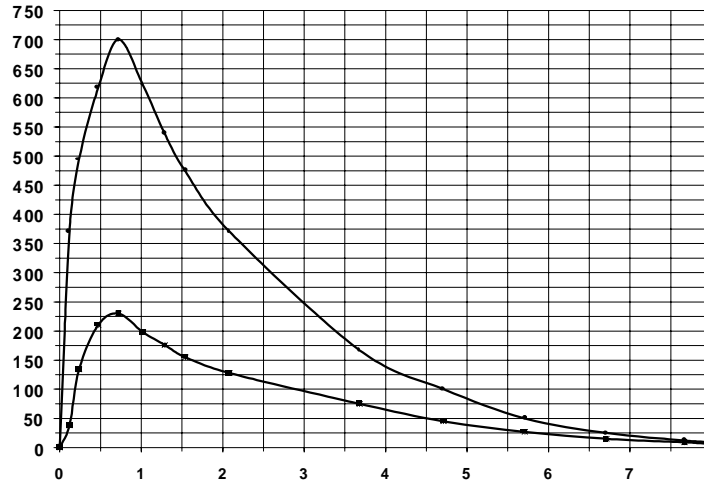

LIFE RATINGS AND QUALIFICATION TEST PLAN				
	Normal Operations		Abnormal Operations	
Test #	1	2	3	4
Current	reference graph and test circuit diagram (sht. 8)		-250 A	2500 A
Voltage	reference graph and test circuit diagram (sht. 8)		320 V	320 V
Load Type	Capacitive	Capacitive	Resistive	Resistive
% Pre Charge	90%	70%	N/A	N/A
Switch Mode	make only	make only	make/ break	break only
Sequence				
1	10K cycles	10 cycles	2	2
2	10K	10	2	
3	10K	10	2	
4	10K	10	2	2
5	10K	10	2	
Etc.	Continue Cycling to Relay Failure			

The testing objective is to verify proper relay function for a given number of consecutive and cumulative cycles under both normal and abnormal conditions in a variety of load switching applications. The life rating of 40K cycles minimum was calculated with 95% Weibull reliability.

Electrical Data (Over Temperature Range - Max. Terminal Temp. = 200°C)

Make/Break Life for Capacitive & Resistive Loads at 320 Vdc (1) (2)		
@ 90% capacitive pre-charge	Cycles	50,000
@ 70% capacitive pre-charge	Cycles	50
@ -250 A (2 consecutive, reverse polarity) (1)	Cycles	10
@ 3300 A (break only, 2 consecutive) (1)	Cycles	4
Mechanical Life	Cycles	100,000

(1) Resistive load includes inductance L = 25 uH. Load @ 2500 A tested @ 200 uH.

(2) Conductor: 2 each of Copper 54 mm² (AWG 0) required for > 250 A carry.

1 Copper (AWG 0) conductor recommended for ≤ 250 A

(3) Life based on projected Weibull Life with 95% Reliability